

UL-E Series

PUSH AROUND MAST LIFT



- Easy to use push around mast lift
- Compact and lightweight
- Passes through a standard doorway
- Low maintenance
- Available in AC or DC
- Rough Terrain base option (pneumatic tyres)

STANDARD FEATURES


- Ground level controls
- Low battery voltage indicator
- Bubble level indicator
- Plug in outriggers with levelling screws
- Outrigger interlocks
- Easy-load device for pick-up trucks
- Non-marking wheels and castors
- Removable battery box (DC)
- Integrated automatic battery charger (DC) 110-230V

 **snorkel**
www.snorkelifts.com

UL-E Series

PUSH AROUND MAST LIFT

MODELS	UL15E	UL20E	UL25E	UL30E	UL35E	UL36E	UL40E
Working Height (M)	6.4	7.8	9.1	10.5	11.9	12.6	13.8
Platform Height (M)	4.53	5.91	7.23	8.68	10.06	10.75	11.92
Weight Capacity (KG)	159	159	159	159	159	136	136
Power Source	AC 110V or 220V / DC 12V						
STANDARD BASE							
Weights (DC/AC)-KG	345/305	366/326	387/347	408/368	429/389	501/461	512/472
A Stowed Height (CM)	197	197	197	197	197	277	277
B Tilted Back Height (CM)	175	175	175	175	175	197	197
C X D Length/Width(CM)	121 X 74	127 X 74	134 X 74	140 X 74	146 X 74	134 X 74	140 X 74
H X I Outrigger Footprint(CM)	168 X 138	168 X 138	168 X 138	190 X 160	210 X 181	210 X 181	232 X 202
Tilted Back Length(CM)	211	211	211	211	211	282	282
L X M Wall Access(CM)	24 X 34	17 X 34	10 X 34	14 X 45	20 X 58	19 X 58	35 X 66
E X F X G Platform Dimension(CM)	68X66X110	68X66X110	68X66X110	68X66X110	68X66X110	68X66X110	68X66X110
ROUGH TERRAIN BASE							
Weights (DC/AC)-KG	355/315	376/336	397/357	418/378	439/399	511/471	522/482
A Stowed Height (CM)	197	197	197	197	197	277	277
C X D Length/Width(CM)	136 X 84	136 X 84	136 X 84	140 X 84	146 X 84	136 X 84	140 X 84

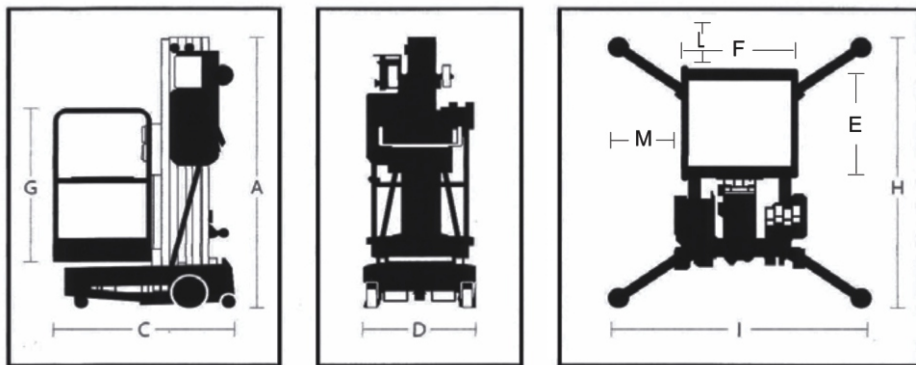



 36 Bruce Road, Levin
 5510, New Zealand
 t: +64 (0)6 368 9168
 f: +64 (0)6 368 9164
 e: sales.nz@snorkellifts.com

www.snorkellifts.com